Deed Book 1209, Page 46
Map # 2019-172

ZONED: R-30

MINIMUM SETBACK REQUIREMENT

Front ------35'
Side-------10'
Rear-------25'
Corner------20'

LEGEND:

FIP..... Found Iron Pipe
CP .....Computed Point
* .....Control Corner
FRB..... Found Rebar

LINE LEGEND:

Subject Tract Surveyed
Lines Not Surveyed
Setback Line
Surveyed Lines, R/W or Tie Line
Not to Scale

FREEDOM FAMILY HOMES
P.O. Box 608, Dunn NC 28335

PLANTERS GLEN SUBDIVISION
PHASE 2, LOT 26

BLACK RIVER TWP HARNETT CO NC

MAY 22, 2020

0 30 60 90

1" = 30'

PIN: 0662-88-2359.000 PID: 040673 0125 59

NORTH CAROLINA PROFESSIONAL SEAL L-4332 LAND SURVEYOR J. SCOTT WALKER

J. Scott Walker

MAY 22, 2020

SURVEY BY:
J. SCOTT WALKER, PLS
835 ABATTOIR RD, COATS NC 27521
(910) 897-5753

This is Not to Be Considered a Certified Document

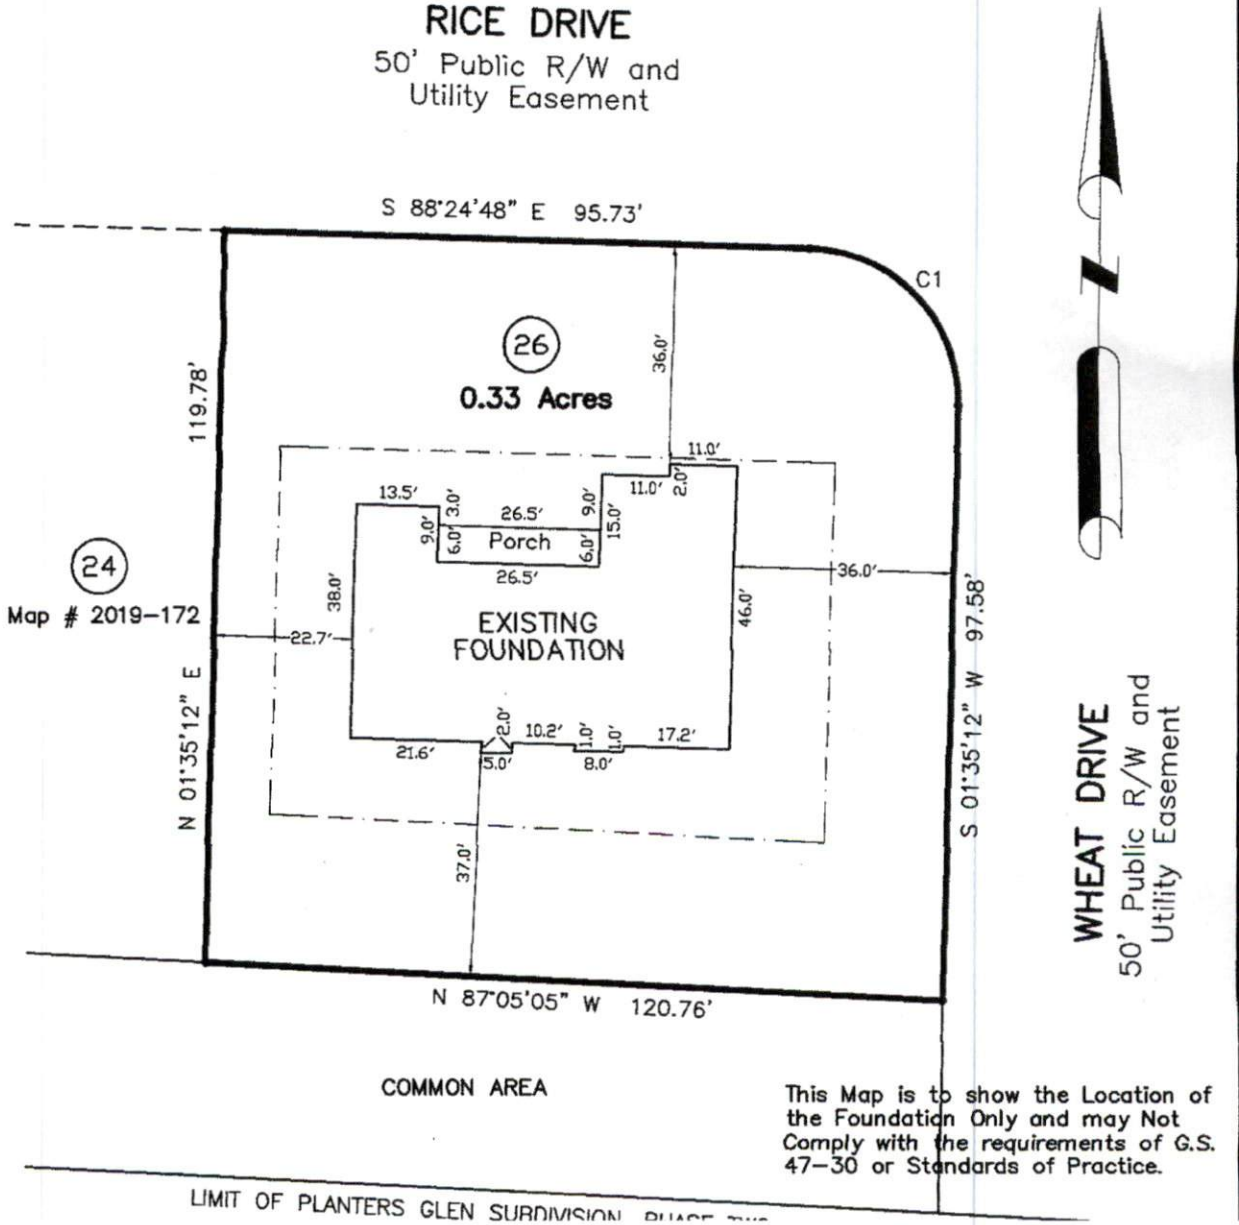

This Map is to show the Location of the Foundation Only and may Not Comply with the requirements of G.S. 47-30 or Standards of Practice.