Preliminary Soils Evaluation
Paula Stephenson
Lots 1-5
Hobby Road - Harnett County

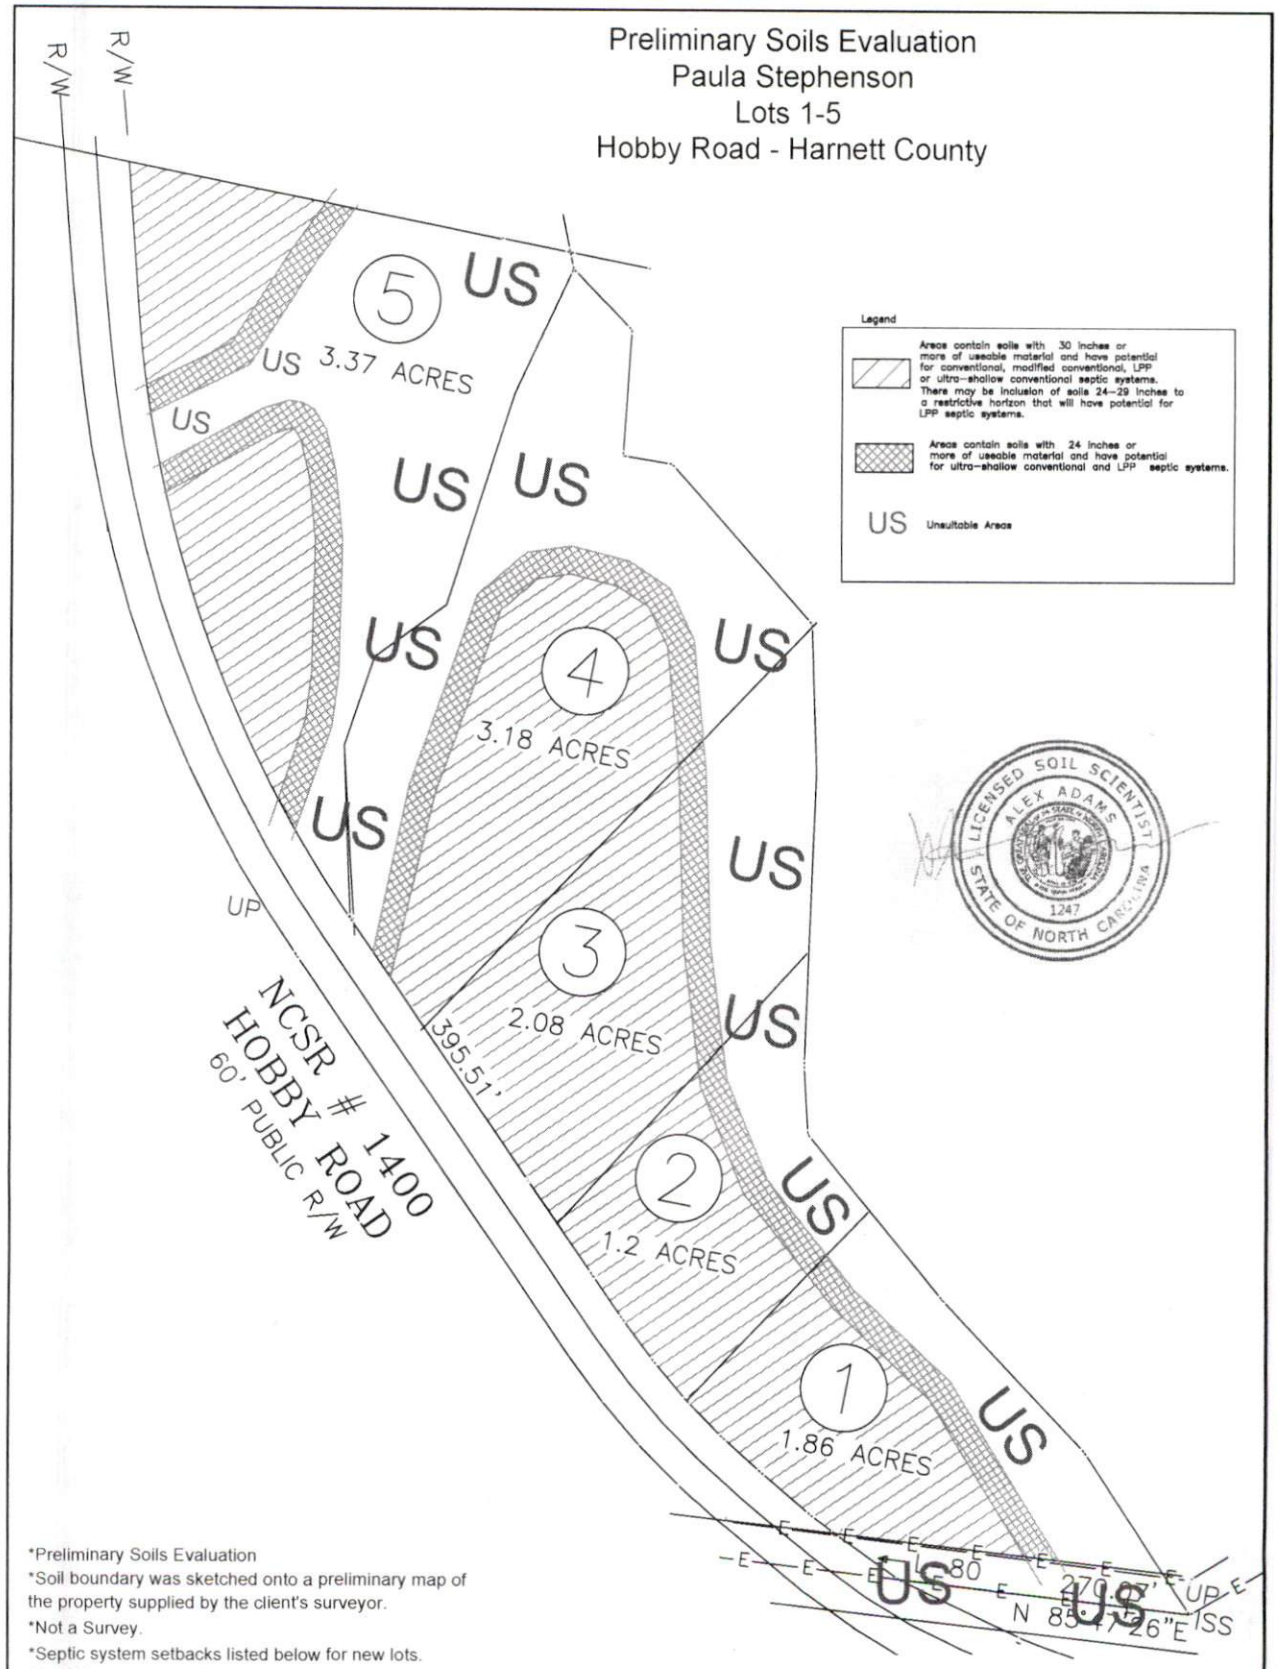

*Preliminary Soils Evaluation
*Soil boundary was sketched onto a preliminary map of the property supplied by the client's surveyor.
*Not a Survey.
*Septic system setbacks listed below for new lots.
1) 10' from property lines.
2) 100' from wells for primary and repair systems.
3) 50' from surface waters (streams, ponds, lakes).
*Any mechanical disturbances such as grading, cutting and filling of the suitable soil areas can render areas unsuitable for future septic systems.
*See accompanying report for additional information.
*Due to Soil Variability, Adams soil consulting cannot guarantee that the areas shown as suitable will be permitted by the local Health Department.

GRAPHIC SCALE
1" = 100'
100 0 100 200

Adams
Soil Consulting
919-414-6761
Project #653